

# Neo Compact



We Also Stock:

Panel Heaters | Electric Radiators | Infrared Heaters | Towel Rails | Bathroom Heaters | Elements |  
| Dual Fuel Kits |




# ADAX Neo Compact

Based on the ADAX Neo WiFi, the Neo compact is visually identical. However the heater has been reshaped making the case more compact.

The width is narrower and height taller. Making it easier to fit the heater into the available space.

| NEO |


## Interchangeable Modules

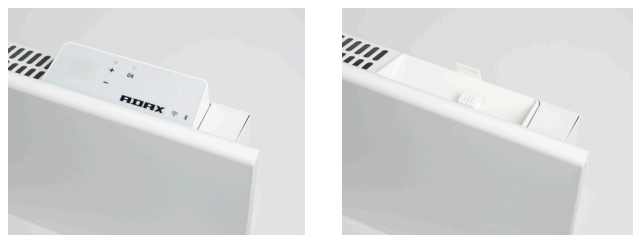

The Neo compact's control is a module system. The control panel can be easily unclipped and replaced. We offer 3 module versions:

- **WT WiFi** - This turns the heater into a WiFi unit. Giving all of the ADAX WiFi features.
- **DT** - Non WiFi version, has the same controls as the ADAX NEONP.
- **SLX** - Removes the control panel turning the heater into a "no control" unit. Suitable if the heater is being controlled by an external thermostat system.

Please note: Models DT and SLX are made to order. Thus have a longer lead time than the WT (WiFi).

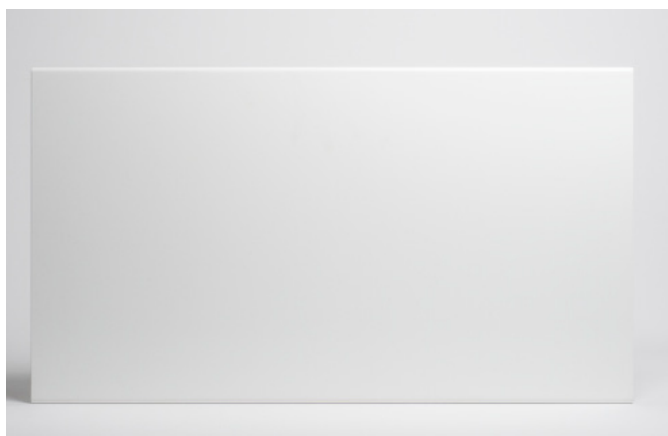

| Model     | Power, W | Dimensions, mm  | Heated Space, m2 |
|-----------|----------|-----------------|------------------|
| NCH05KWT* | 500      | 420 x 430 x 85  | 6                |
| NCH07KWT* | 750      | 420 x 510 x 85  | 10               |
| NCH10KWT* | 1000     | 420 x 555 x 85  | 12.5             |
| NCH15KWT* | 1500     | 420 x 755 x 85  | 17.5             |
| NCH20KWT* | 2000     | 420 x 955 x 85  | 25               |
| NCH25KWT* | 2500     | 420 x 1170 x 85 | 30               |

# Description

The Neo is a stylish range of electric panel heaters. Suitable for use in domestic and commercial applications. Available colours are White (RAL 9016) or Lava Grey.

The Neo is available in several power outputs (400w, 600w, 800w, 1000w, 1200w, 1500w , 2000w and 2500w), making it suitable for any space.

The Neo is designed to be wall mounted, however portable free standing legs are available.

Electric panel heaters provide instant heat and will warm the room very quickly compared to other electric heaters, such as ceramic / storage heaters.

As a rough guide, we estimate, in the average UK home to spec at least 80w per m2 to comfortably heat the area. Please note in spaces, such as conservatories, more power will be required.



Electric panel heaters must not be covered or mounted vertically.

The Neo is ErP2018/Lot20 compliant. As per Lot20 regulations, every electric heater, used as a primary heat source, must meet this requirement.

- Easy to install with 3 pin UK plug: Class II double insulated
- Fully compliant with ErP2018/Lot20 regulations
- Digital temperature display
- Overheat safety cut out
- 5 year product guarantee
- Made in Europe with full European certification



# NEO C

| Model   | Power, W | Dimensions, mm  |
|---------|----------|-----------------|
| NCH05K* | 500      | 420 x 430 x 85  |
| NCH07K* | 750      | 420 x 510 x 85  |
| NCH10K* | 1000     | 420 x 555 x 85  |
| NCH15K* | 1500     | 420 x 755 x 85  |
| NCH20K* | 2000     | 420 x 955 x 85  |
| NCH25K* | 2500     | 420 x 1170 x 85 |

|            |                  |
|------------|------------------|
| Brand      | ADAX             |
| Model      | Neo C            |
| Mount Type | Wall Mounted     |
| Warranty   | 5 Years          |
| Colours    | White, Lava Grey |
| Style      | Convactor Heater |

K\* Add WT, SLX or DT for relevent module.

## Module

### WIFI WT

| Feature               | Y (Yes) N (No) |
|-----------------------|----------------|
| Electric Thermostat   | Y              |
| Timer                 | Y              |
| 24 / 7 Programming    | Y              |
| Open Window Detection | Y              |
| Adaptive start        | Y              |
| Distance Control      | Y              |
| Display               | Y              |
| Over Heat Protection  | Y              |
| Frost Protection      | Y              |
| Wall Mount Brackets   | Y              |

### DT

| Feature               | Y (Yes) N (No) |
|-----------------------|----------------|
| Electric Thermostat   | Y              |
| Timer                 | Y              |
| 24 / 7 Programming    | Y              |
| Open Window Detection | Y              |
| Adaptive start        | Y              |
| Distance Control      | N              |
| Display               | Y              |
| Over Heat Protection  | Y              |
| Frost Protection      | Y              |
| Wall Mount Brackets   | Y              |

### SLX

| Feature               | Y (Yes) N (No) |
|-----------------------|----------------|
| Electric Thermostat   | N              |
| Timer                 | N              |
| 24 / 7 Programming    | N              |
| Open Window Detection | N              |
| Adaptive start        | N              |
| Distance Control      | N              |
| Display               | N              |
| Over Heat Protection  | Y              |
| Frost Protection      | N              |
| Wall Mount Brackets   | Y              |



# Colours:

White & Lava Grey



- IP24 Splashproof
- 1.2m Flex Length
- Flex Position; Bottom Right
- Height 420mm
- Depth 85mm
- Silent Operation

## WiFi Requirements

Wi-Fi 2,4 GHz, WPA2, 802.11 b/g/n + Bluetooth  
iPhone (IOS 10.0 or higher)  
Android 5.0 or higher

Ensure that there is a good Wifi signal where the heater will be installed.

To connect with the APP, the SSID and password field must be complete. The

App will not work on networks without a password.



Sol\*Aire Heating Products LTD  
Big Shed  
New Row  
Eppleby  
DL11 7AW

(+ 44) 01325 717 899  
[info@solairehp.co.uk](mailto:info@solairehp.co.uk)  
[adax-solaire.co.uk/trade](http://adax-solaire.co.uk/trade)