

# ADAX CLEA L WiFi

## Overview





Stylish and modern electric panel heater with digital controls. Fully ERP LOT20 compliant.

- Programmable thermostat and timer
- In built WiFi control
- Open window detection
- Adaptive heating start
- Slimline Norwegian design
- Simple and discrete control panel



## Specs

Room Sensors	<ul style="list-style-type: none"> <li>• Electric Thermostat - accurate to (0.5 °C) range 5-35 °C.</li> <li>• Open Window Detection - activated after temperature drop of 5 degrees in 10 Min</li> </ul>
Programmer	<ul style="list-style-type: none"> <li>• 24 hour 7 day inbuilt timer</li> <li>• Assign "Comfort", "sleep" and "away" modes using the timer.</li> <li>• Create unlimited schedules</li> </ul>
Manual Control	<ul style="list-style-type: none"> <li>• Manual thermostat adjustment</li> </ul>
WiFi Control	<ul style="list-style-type: none"> <li>• Inbuilt WiFi connectivity</li> <li>• Complete WiFi App control</li> <li>• Records energy consumption</li> </ul>
Display	<ul style="list-style-type: none"> <li>• LED digital display</li> </ul>
Eco Features	<ul style="list-style-type: none"> <li>• Open window detection</li> <li>• Adaptive heating start</li> </ul>
Installation	<ul style="list-style-type: none"> <li>• 1 H wall bracket</li> </ul>
Protection	<ul style="list-style-type: none"> <li>• IP24</li> <li>• Over heat protection</li> </ul>
Element	<ul style="list-style-type: none"> <li>• Aluminium X fin</li> </ul>
Flex Length	<ul style="list-style-type: none"> <li>• 1.2m</li> </ul>
Clearances	<ul style="list-style-type: none"> <li>• 50mm below, 150mm above, 50 in front.</li> </ul>
Material	<ul style="list-style-type: none"> <li>• Glass / Mild Steel</li> </ul>

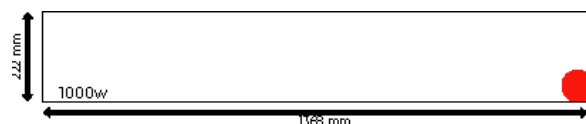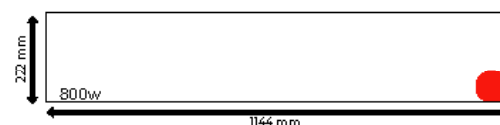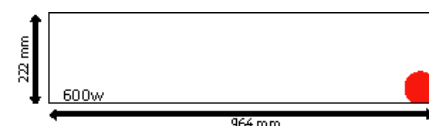

## Detail

Guarantee	5 Years (Bodywork and Electronics)
Manufacturer	ADAX AS
Colours	White, Black

Codes	Size(mm)	Weight(Kg)
CLEAL06KWT	600w 222 x 964 x 88	6.5
CLEAL08KWT	800w 222 x 1144 x 88	7
CLEAL10KWT	1000w 222 x 1368 x 88	8.5

## WiFi Requirements

Wi-Fi 2.4 GHz, WPA2, 802.11 b/g/n + Bluetooth  
 iPhone (IOS 10.0 or higher)  
 Android 5.0 or higher

Ensure that there is a good Wifi signal where the heater will be installed.

To connect with the APP, the SSID and password field must be complete. The App will not work on networks without a password.