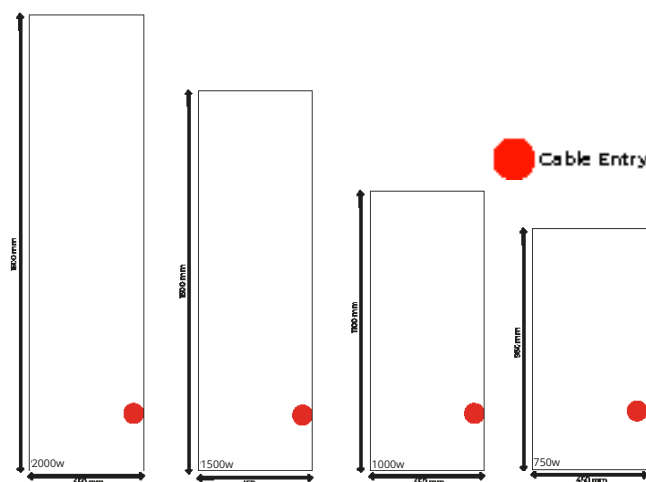# ICON WiFi

Overview

Smart WiFi vertical electric radiator. Dual Therm, radiant panel heating. Fully ERP LOT20 compliant.

- Programmable thermostat and timer
- WiFi Control
- Splash proof
- Open window detection
- Energy optimiser

Specs

Room Sensors	• Electric Thermostat - accurate to (0.5 °C) range 7-30 °C • Open window detection
Manual Control	• Complete functionality using control panel
WiFi Control	• Inbuilt WiFi connectivity • Fully programmable with Radialight App • App available on IOS and Android stores • 2.4ghz WiFi
Programmer	• 24 hour 7 day inbuilt timer • 3 Heating Modes - "Comfort", "Eco" and "Anti-Frost"
Display	• LCD digital display
Eco Features	• Open window detection • Energy optimiser - Lowers energy consumption as room reaches temperature • Records energy consumption
Installation	• 1 H wall bracket
Protection	• IP24 • Over heat protection
Element	• Aluminium X fin convector • Radiant element in front panel
Flex Length	• 1.2m
Clearances	• 150mm below, 150mm above, 150mm in front
Material	• Mild Steel

WiFi Requirements

Wi-Fi 2,4 GHz,
iPhone (IOS 10.0 or higher)
Android 5.0 or higher

Ensure that there is a good Wifi signal where the heater will be installed.

Cable Entry

2000w   1500w   1000w   750w

Detail

Guarantee	2 Years (Bodywork and Electronics)
Manufacturer	Radialight
Colours	White, Anthracite

Codes		Size(mm)	Weight(Kg)
ICON07	700w	450 x 950 x 105	7.9
ICON10	1000w	450 x 1100 x 105	12.5
ICON15	1500w	450 x 1500 x 105	14.8
ICON20	2000w	450 x 1800 x 105	18.2