




Bathroom Towel Rails Data Sheets





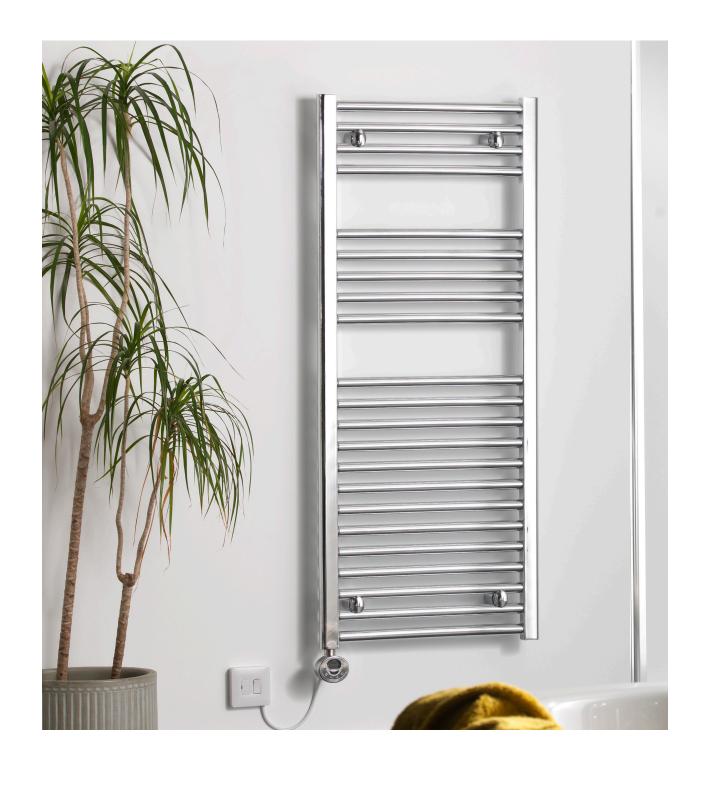



Overview

The Bray is a premium quality towel rail designed to dry towels and heat your bathroom

- Professional filling & electric conversion service included
- Delivered ready to mount to your wall
- IP67 Rated. Suitable for all bathroom zones
- Bright polished chrome finished towel rail
- · Anti-corrosion treated & tested

Detail	
Guarantee	5 years (Radiator) 2 years (Electronics)
Manufacturer	SolAire
Colours	Chrome
Flex Position	Either side

Specs	
Installation	4 wall brackets
Protection	IP67Over heat protection
Element	Constant power cartridge element
Flex Length	• 1.2m
Material	Mild Steel

Feature	Y (Yes) N (No)
Electric Thermostat	N
Timer	N
24 / 7 Programming	N
Open Window Detection	N
Adaptive start	N
Remote Control	N
Display	N
Anti Tamper Lock	N
Pre filled	Υ
Temperature Control	N
Frost Protection	N
Manual Setting	N
Splash Proof	Υ
WiFi Control	N

Element adds 75mm to the radiator's hight

E.g. 1200mm (Radiator) + 75 mm (element protrusion)

Bray | R3 Thermostatic Electric with Timer





Overview

The Bray is a premium quality towel rail designed to dry towels and heat your bathroom

- Professional filling & electric conversion service included
- Delivered ready to mount to your wall
- IP64 Rated. Suitable for all bathroom zones
- Bright polished chrome finished towel rail
- Anti-corrosion treated & tested

Detail	
Guarantee	5 years (Radiator) 2 years (Electronics)
Manufacturer	SolAire
Colours	Chrome
Flex Position	Either side

Feature	Y (Yes) N (No)
Electric Thermostat	Υ
Timer	Υ
24 / 7 Programming	Υ
Open Window Detection	Υ
Adaptive start	N
Remote Control	Υ
Display	Υ
Anti Tamper Lock	Υ
Pre filled	Υ
Temperature Control	Υ
Frost Protection	Υ
Manual Setting	Υ
Splash Proof	Υ
WiFi Control	N

	Specs
Room Sen- sors	 Dual Thermostat - Record air temperature (set range 18°C - 32°C) or surface temperature (set range 30°C - 70°C) Open window detection Automatic frost protection @ 7°C
Control	 Manual control panel Surface temperature adjustment 1 or 2 hour boost mode Remote control Full control over the radiator Anti-Tamper lock
Programmer	• 24 hour 7 day inbuilt timer
Display	LCD digital display
Eco Features	Open window detection
Installation	4 wall brackets
Protection	IP64Over heat protection
Element	R3 Thermostatic element
Flex Length	• 1.2m
Material	Mild Steel

Element add 75mm to the radiator's hight

E.g. 1200mm (Radiator) + 75 mm (element protrusion)

Bray | R4

Thermostatic Electric with Timer and WiFi Control





Overview

The Bray is a premium quality towel rail designed to dry towels and heat your bathroom

- Professional filling & electric conversion service included
- Delivered ready to mount to your wall
- IP64 Rated. Suitable for all bathroom zones
- Bright polished chrome finished towel rail
- · Anti-corrosion treated & tested

Detail	
Guarantee	5 years (Radiator) 2 years (Electronics)
Manufacturer	SolAire
Colours	Chrome
Flex Position	Either side

Feature	Y (Yes) N (No)
Electric Thermostat	Υ
Timer	Υ
24 / 7 Programming	Υ
Open Window Detection	Υ
Adaptive start	N
Remote Control	N
Display	Υ
Anti Tamper Lock	Υ
Pre filled	Υ
Temperature Control	Υ
Frost Protection	Υ
Manual Setting	Υ
Splash Proof	Υ
WiFi Control	Υ

Is compatible with the remote R3. Remote is supplied separately.

	Specs
Room Sen- sors	 Dual Thermostat - Record air temperature (set range 18°C - 32°C) or surface temperature (set range 30°C - 70°C) Open window detection Automatic frost protection @ 7°C
Control	 Manual control panel Surface temperature adjustment 1 or 2 hour boost mode WiFi App control Full control over the radiator Anti-Tamper lock
Programmer	• 24 hour 7 day inbuilt timer
Display	LCD digital display
Eco Features	Open window detection
Installation	4 wall brackets
Protection	IP64Over heat protection
Element	R3 Thermostatic element
Flex Length	• 1.2m
Material	Mild Steel

Element add 100mm to the radiator's hight

E.g. 1200mm (Radiator) + 100mm (element protrusion)

SolAire

Bray Chrome


Overview

The Bray is a premium quality towel rail designed to dry towels and heat your bathroom

- Anti-corrosion treated & tested
- Liquid Filled

Detail	
Guarantee	5 years (Radiator)
Brand	SolAire
Colours	Chrome
Installation	4 wall brackets
Flex Position	Either side



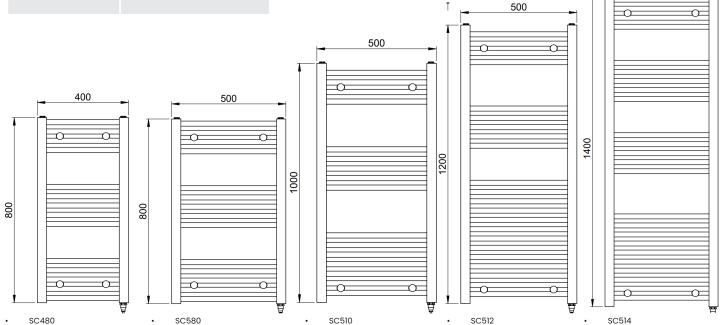

- CP Wattage = 150w
- R3/4 Wattage = 300w
- Width = 400mm
- Hight = 800mm
- Pipe Centres = 355
- BTU T60°C = 713
- Bar Diameter = 22mm
- SC580
- CP Wattage = 150w
- R3/4 Wattage = 300w
- Width = 500mm
- Hight = 800mm
- Pipe Centres = 455
- BTU T60°C = 860
- Bar Diameter = 22mm
- SC510
- CP Wattage = 200w
- R3/4 Wattage = 300w
- Width = 500mm
- Hight = 1000mm
- Pipe Centres = 455
- BTU T60°C = 1051
 - Bar Diameter = 22mm
- CP Wattage = 300w
- R3/4 Wattage = 600w
- Width = 500mm
- Hight = 1200mm
- Pipe Centres = 455

Bar Diameter = 22mm

- BTU T60°C = 1290
- CP Wattage = 300w
- R3/4 Wattage = 600w

500

- Width = 500mm
- Hight = 1400mm
- Pipe Centres = 1471 BTU T60°C = 1859
- Bar Diameter = 22mm


SolAire

Bray White

Overview

The Bray is a premium quality towel rail designed to dry towels and heat your bathroom

- Anti-corrosion treated & tested
- Liquid Filled

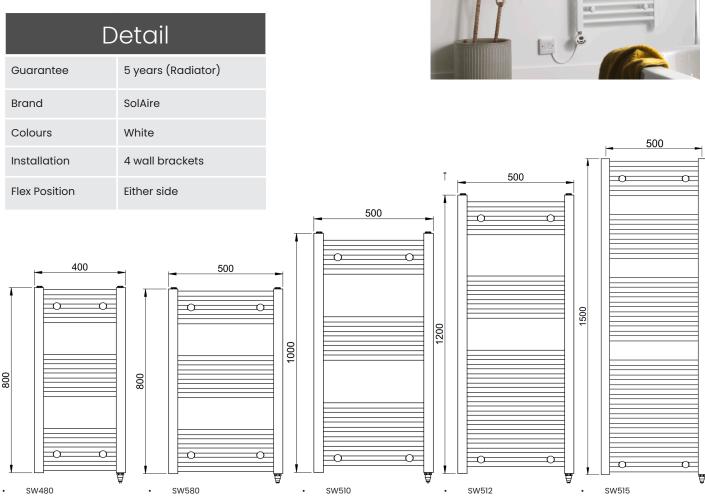

- CP Wattage = 150w
- R3/4 Wattage = 300w
- Width = 400mm
- Hight = 800mm
- Pipe Centres = 355
- BTU T60°C = 855
- Bar Diameter = 25mm
- CP Wattage = 150w
- R3/4 Wattage = 300w
- Width = 500mm
- Hight = 800mm
- Pipe Centres = 455
- BTU T60°C = 1119
- Bar Diameter = 25mm
- CP Wattage = 200w
- R3/4 Wattage = 300w
- Width = 500mm
- Hight = 1000mm
- Pipe Centres = 455
- BTU T60°C = 1678
- Bar Diameter = 25mm
- CP Wattage = 300w
- R3/4 Wattage = 600w
- Width = 500mm
- Hight = 1200mm
- Pipe Centres = 455
- BTU T60°C = 1965
- CP Wattage = 300w
- R3/4 Wattage = 600w

Pipe Centres = 455

- Width = 500mm
- Hight = 1500mm
- BTU T60°C = 2197
- Bar Diameter = 25mm Bar Diameter = 25mm


SolAire

Bray Black

Overview

The Bray is a premium quality towel rail designed to dry towels and heat your bathroom

- Anti-corrosion treated & tested
- Liquid Filled

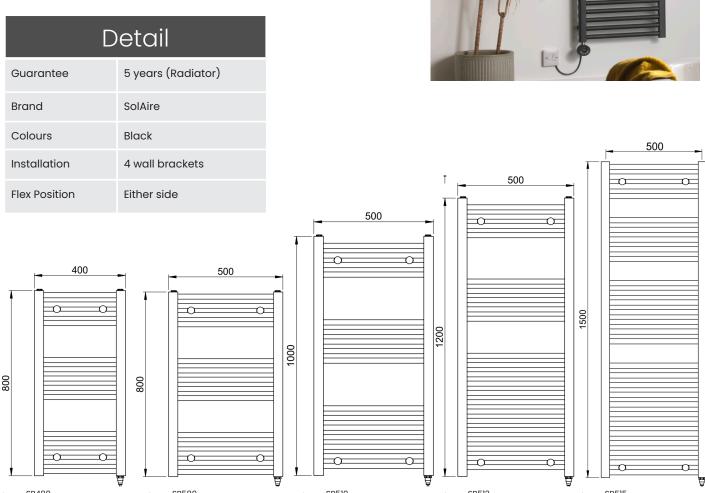

- SB480
- CP Wattage = 150w
- R3/4 Wattage = 300w
- Width = 400mm
- Hight = 800mm
- Pipe Centres = 355
- BTU T60°C = 855
- Bar Diameter = 25mm
- SB580
- CP Wattage = 150w
- R3/4 Wattage = 300w
- Width = 500mm
- Hight = 800mm
- Pipe Centres = 455
- BTU T60°C = 1119
- Bar Diameter = 22mm
- CP Wattage = 200w
- R3/4 Wattage = 300w
- Width = 500mm
- Hight = 1000mm
- Pipe Centres = 455
- BTU T60°C = 1678

Bar Diameter = 22mm

- SB512
- CP Wattage = 300w
- R3/4 Wattage = 600w
- Width = 500mm
- Hight = 1200mm
- Pipe Centres = 455 BTU T60°C = 1965
 - Bar Diameter = 22mm
- SB515
- CP Wattage = 300w
- R3/4 Wattage = 600w
- Width = 500mm
- Hight = 1500mm Pipe Centres = 455
- BTU T60°C = 2197
- Bar Diameter = 25mm